

1:1

IMEXCC0047

www.vieropaints.com

Viero

WOOD



Wood

Decorative plaster for “wood” effect

Description

STONE-WOOD is a pre-blended plaster made of water dispersible acrylic resin, micronized inert charges, light stable pigments and specific additives. Recommended for fine decoration of interior walls where a “wood” effect is desired.

Method of application

Base Coat

- after the wall preparation, apply a priming undercoat of VIEROQUARTZ thinned 1:1 in water in the same colour of STONE-WOOD. The use of VIEROQUARTZ as a base coat gives an initial coloured covering and protection and facilitates the application of the coating.

Steel trowel + sorghum broom + brush

1. When VIEROQUARTZ is completely dry, apply a uniform layer of STONE-WOOD with a small stainless steel trowel all over the surface as base coat
2. Once the first coat is dry, apply with the same tool a consistent layer about 3mm thick of STONE-WOOD to the wall
3. Then pass over the surface vertically with a sorghum broom.
4. As soon as the plaster is no longer tacky to the touch work across vertically the surface with a blade of stainless steel trowel in a quick sweeping action to smooth the surface
5. When the surface is completely dry (12-24 hours) burnish the wall with a soft stainless steel spatula
6. Apply by brush a grout of diluted product (ratio 2:1 with water) adding 5% -10 % of VIERO BITUME DECORATIVO.
7. Once dried, smooth and burnish the wall with a soft stainless steel spatula thus breaking the black spots contained in the grout
8. Wait until dry and buff it with a dry, clean cotton cloth.
9. It is advisable to apply by brush a layer of LIGHTING transparent protective finish, thinned 1:3 with water

Consumption rate

1,7-2,0 Kg/m²

Interiors / Exteriors

Interiors

Warning


The colours shown are indicative only



WENGÉ



TEAK

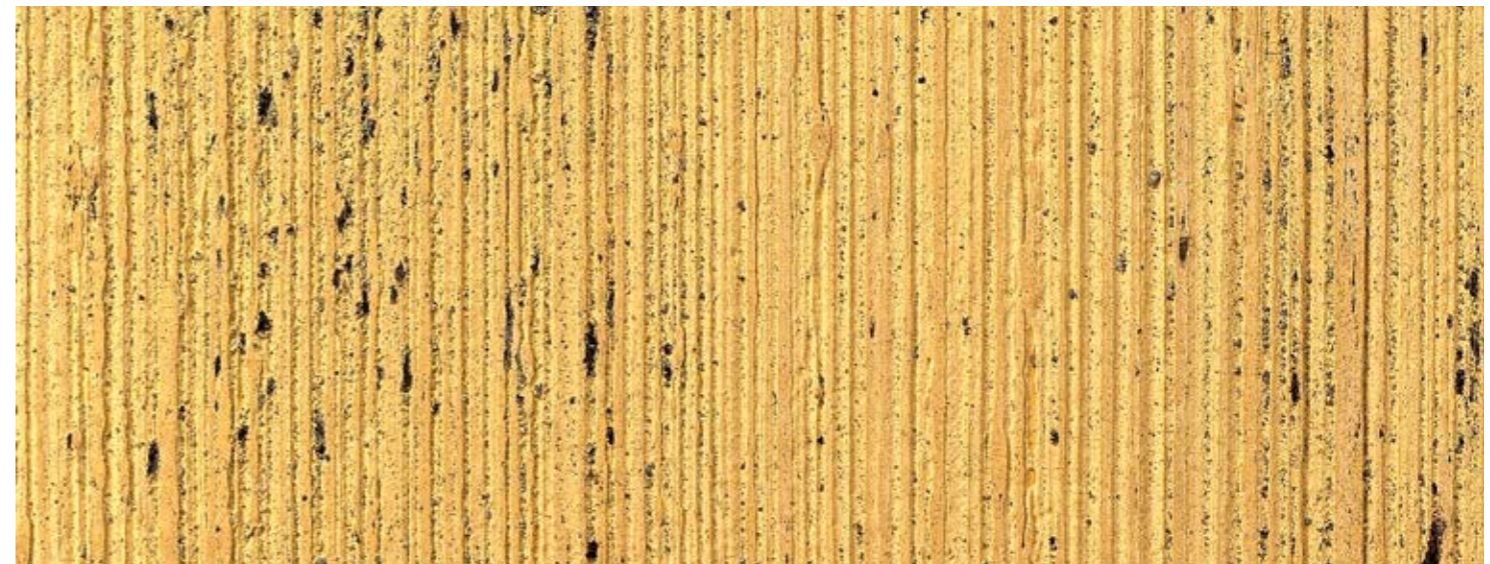

IROKO