

1:1

MKEXC0016

Viero

CERAMITZ

www.vieropaints.it



Ceramitz

High quality, continuous wall coating based on colored quartz sands

Description Continuous architectural spray-on wall coating for all type of interior and exterior. Especially indicated when high resistance to abrasion and shock and to stressing climatic cycles is required. CERAMITZ is an excellent water repellent product with good transpiration properties.

Method of application

Base Coat
 On new cement rendering and/or cement lime mortar:

- One coat of VIEROQUARTZ thinned 1:1 with water in a matching color of the product to be used.

On Gypsum plasters and other very smooth surfaces:

- One coat of PRYMER SE and one coat of VIEROQUARTZ thinned 1:1 with water in a matching color of the product to be used.

On chalky, absorbent and degraded surfaces:

1. Carefully remove all parts not perfectly anchored to the substrate, and restore the surface.
2. One coat of PRYMER SE and one coat of VIEROQUARTZ thinned 1:1 with water in a matching color of the product to be used.

Finishing
 After the preparation of the substrate, apply CERAMITZ using only an airless spraygun with open cup tank on top, (like RDZ) with a 6/8 mm nozzle and using air pressure of about 2 – 2,5 atm. CERAMITZ is ready to use. If necessary, dilute the product with maximum 5% of water, maintaining the same thinning throughout the entire application. Spray the product uniformly keeping the spray gun always perpendicular to the wall. The thickness of the applied product must be at least 1.5 mm.

Consumption rate 3 kg/m²

Interiors / Exteriors Interiors and Exteriors

Warning The colours shown are indicative only



7200



7975



7970




7635



6220




6580

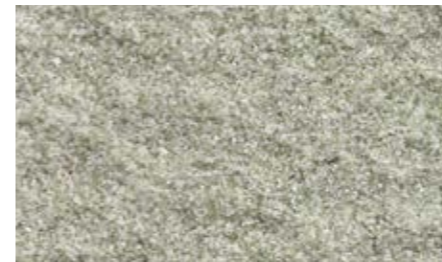

6210




7930

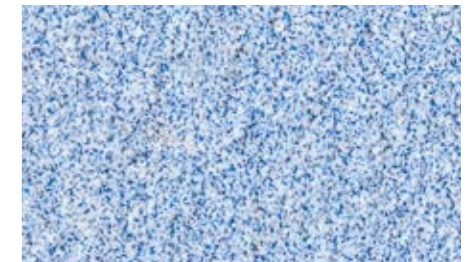

7980



6180

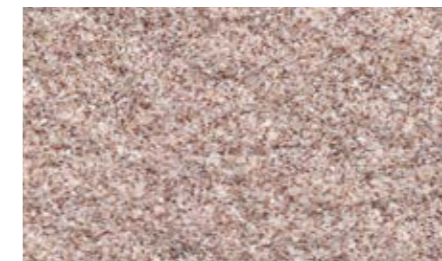

6775



7895



7435



7730




6780



7830



7430

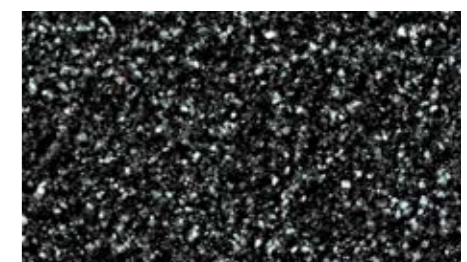

6430