

1:1

MKEXCC0050

[www.vieropaints.com](http://www.vieropaints.com)

Viero

KRAKKE



# Krackle

Self-cracking decorative plaster.

## Description

KRAKKLE is a pre-blended plaster made of water dispersible acrylic resin, micronized inert charges, light stable pigments and specific additives. Recommended for fine decoration of interior walls where a “cracked” effect is desired.

## Method of application

### Base Coat

- after the wall preparation, apply a priming undercoat of VIEROQUARTZ thinned 1:1 in water in the same colour of Krackle. The use of VIEROQUARTZ as a base coat gives an initial coloured covering and protection and facilitates the application of the coating.

### Steel trowel + sorghum broom/roller + brush

- When VIEROQUARTZ is completely dry, apply an uniform layer of KRAKKLE with a small stainless steel trowel all over the surface
- Once the first coat is dry, apply, with the same tool, a consistent layer of minimum 5 mm thick of KRAKKLE to the wall
- Then with a sorghum broom pass over the surface vertically. The product will self-crack during the drying phase (1-2 days). The type and number of cracks will depend on the thickness of product applied and the tool used for the decoration: the higher the thickness the greater the dimension and quantity of cracks the finish will produce.

## Consumption rate

3,5-4,0 Kg/m<sup>2</sup>

## Interiors / Exteriors


Interiors

## Warning

The colours shown are indicative only



CHARCOL

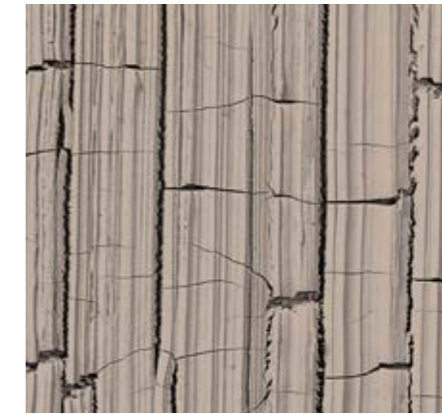

MUSHROOM



BLUSH GRAY



CONCRETE



PEARL




SAND



SOAP



POWDER

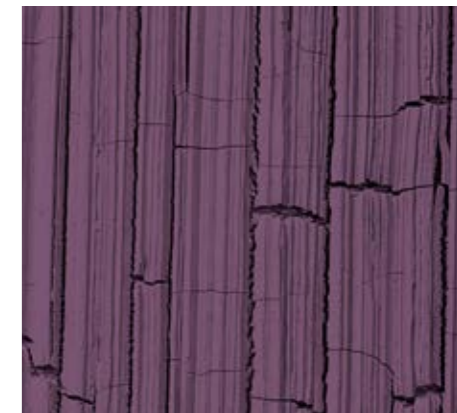

AUBERGINE



SANDAL WOOD



POMICE